


Absolute encoders – singleturn

Compact, robust magnetic	Sendix M3651AR (shaft)	Analog
---------------------------------	-------------------------------	---------------

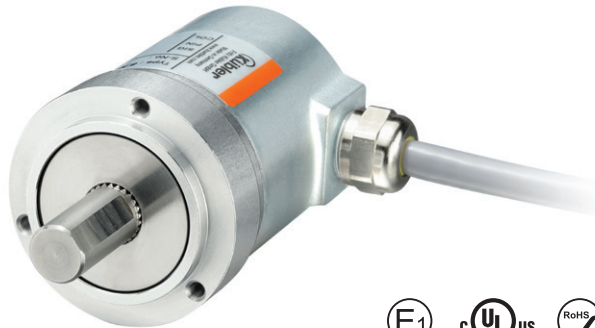

The Sendix M3651AR singleturn encoders with analog interface and magnetic sensor technology are particularly flexible in use due to their diverse interfaces and measuring ranges.

The "R"obust version is particularly suitable for use in harsh environments. Protected up to IP69k, resistance against shock and extreme temperature fluctuations, the Sendix M36 encoders are suitable even for demanding outdoor applications.



Safety-Lockplus™	Standard option stainless steel 1.4404	Standard option seawater resistant	High rotational speed	Temperature range -40°... +85°C	High protection level IP	High shaft load capacity	Shock / vibration resistant	Reverse polarity protection

Highest robustness

- Sturdy bearing construction in Safety-Lockplus™ design for particularly high resistance.
- Extra large bearings.
- Mechanically protected shaft seal.
- Protection level IP66, IP67 and IP69k in one device.
- Wide temperature range -40°C ... +85°C.

Application oriented

- Current output 4 ... 20 mA.
- Voltage output 0 ... 10 V or 0 ... 5 V.
- Different measuring ranges.
- Set input for easy start-up.

Order code	8.M3651AR	.XXXX	.XXXX	2
Shaft version	Type	a	b	c

- a** Version
 - 1 = standard ¹⁾
clamping flange ø 42 mm [1.65"]
 - 7 = stainless steel V4A ²⁾
clamping flange ø 42 mm [1.65"]
all metal parts accessible from outside are out of stainless steel V4A
- b** Shaft (ø x L), with flat
 - 1 = ø 6 x 12.5 mm [0.24 x 0.49"]
 - 3 = ø 8 x 15 mm [0.32 x 0.59"]
 - 5 = ø 10 x 20 mm [0.39 x 0.79"]
 - 2 = ø 1/4" x 12.5 mm [0.49"]
 - E = ø 10 x 20 mm [0.39 x 0.79"], stainless steel V4A

- c** Output circuit ³⁾
 - 3 = current output
 - 4 = voltage output
 - d** Type of connection
 - 2 = radial cable, 1 m [3.28'] PVC
 - B = radial cable, special length PVC *)
 - 4 = radial M12 connector, 5-pin
- *) Available special lengths (connection types B):
2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21"]
order code expansion .XXXX = length in dm
ex.: 8.M3651AR.133B.3112.0030 (for cable length 3 m)

- f** Measuring range
 - 1 = 1 x 360°
 - 2 = 1 x 180°
 - 3 = 1 x 90°
 - 4 = 1 x 45°
 - g** Counting direction
 - 1 = cw
 - 2 = ccw
- Optional on request*
- Ex 2/22 (only for connection type 4)
- other shaft diameters out of V4A stainless steel

- e** Interface / resolution / supply voltage
 - 3 = 4 ... 20 mA / 12 bit / 10 ... 30 V DC
 - 4 = 0 ... 10 V / 12 bit / 15 ... 30 V DC
 - 5 = 0 ... 5 V / 11 bit / 10 ... 30 V DC

1) Not in conjunction with shaft type "E".
2) Only in conjunction with shaft type "E" + type of connection "4".
3) Output circuit "3" only in conjunction with interface "3",
output circuit "4" only in conjunction with interface "4" or "5".

Absolute encoders – singleturn

Compact, robust magnetic	Sendix M3651AR (shaft)	Analog
Mounting accessory for shaft encoders		Order no.
Coupling	Bellows coupling ø 19 mm [0.75"] for shaft 8 mm [0.32"]	8.0000.1102.0808 ¹⁾
Cables and connectors		Order no.
Preassembled cables	M12 female connector with coupling nut, 5-pin, A coded, straight single ended 2 m [6.56"] PVC cable	05.00.6081.2211.002M ¹⁾
Connectors	M12 female connector with coupling nut, 5-pin, A coded, straight (metal)	8.0000.5116.0000 ¹⁾
	M12 female connector with coupling nut, 5-pin, A coded, straight (stainless steel V4A)	8.0000.5116.0000.V4A

Further Kübler accessories can be found at: kuebler.com/accessories
 Further Kübler cables and connectors can be found at: kuebler.com/connection-technology

Technical data

Electrical characteristics current interface 4 ... 20 mA	
Supply voltage	10 ... 30 V DC
Current consumption (no load)	max. 30 mA
Reverse polarity protection of the supply voltage	yes
Short-circuit proof outputs	yes ²⁾
Measuring range	45°, 90°, 180° or 360°
DA converter resolution	12 bit
Singleturn accuracy, at 25°C [77°F]	±1°
Temperature coefficient	< 100 ppm/K
Repeat accuracy, at 25°C [77°F]	±0.2°
Output load	at 10 V DC max. 200 Ohm at 24 V DC max. 900 Ohm at 30 V DC max. 1200 Ohm
Setting time	< 1 ms, R _{Burden} = 900 Ohm, 25°C [77°F]
LEDs (green/red)	- system status - current loop interruption – input load too high - reference point display (only with factory settings) at cw: betw. 0° and 1° at ccw: betw. 0° and -1°
SET input	level = +V for 1 s minimum
PowerON Time	< 1 s
Update rate	1 ms

Electrical characteristics voltage interface 0 ... 10 V / 0 ... 5 V	
Supply voltage	output 0 ... 5 V 10 ... 30 V DC output 0 ... 10 V 15 ... 30 V DC
Current consumption (no load)	max. 30 mA
Reverse polarity protection of the supply voltage	yes
Short-circuit proof outputs	yes ²⁾
Measuring range	45°, 90°, 180° or 360°
DA converter resolution	0 ... 10 V 12 bit 0 ... 5 V 11 bit
Singleturn accuracy, at 25°C [77°F]	±1°
Temperature coefficient	< 100 ppm/K
Repeat accuracy, at 25°C [77°F]	±0.2°
Current output	max. 10 mA
Setting time	< 1 ms, R _{Load} = 1000 Ohm, 25°C [77°F]
LEDs (green/red)	- system status - reference point display (only with factory settings) at cw: betw. 0° and 1° at ccw: betw. 0° and -1°
SET input	level = +V for 1 s minimum
PowerON Time	< 1 s
Update rate	1 ms

1) Not for version "7" (V4A stainless steel)

2) When the supply voltage is correctly applied.

But not output to +V. Supply voltage and sensor output signal are not galvanically isolated.

Absolute encoders – singleturn

Compact, robust magnetic	Sendix M3651AR (shaft)	Analog
---------------------------------	-------------------------------	---------------

Mechanical characteristics		
Maximum speed		4000 min ⁻¹ 2000 min ⁻¹ (continuous)
Starting torque at 20 °C [68 °F]		< 0.01 Nm
Shaft load capacity	radial axial	40 N 20 N
Weight		approx. 250 g [8.82 oz]
Protection acc. to EN 60529		IP66, IP67, IP69k
Working temperature range		-40 °C ... +85 °C [-40 °F ... +185 °F]
Materials		version "1" (standard) version "7" (stainless steel)
	shaft	V2A V4A
	flange	aluminum V4A
	housing	zinc die-cast V4A
	cable	PVC –
Shock resistance acc. to EN 60068-2-27		5000 m/s ² , 4 ms
Vibration resistance acc. to EN 60068-2-6		300 m/s ² , 10 ... 2000 Hz

SET input		
Input		active HIGH
Input type		comparator
Signal level (+V = supply voltage)	HIGH LOW	min. 60 % of +V, max: +V max. 30 % of +V
Input current		< 0.5 mA
Min. pulse duration (SET)		10 ms
Input delay		1 ms
New position data readable after		1 ms
Internal processing time		200 ms

The encoder can be set to zero at any position by means of a HIGH signal on the SET input. Other preset values can be factory-programmed. The SET input has a signal processing time of approx. 1 ms, after which the new position data can be read. Once the SET function has been triggered, the encoder requires an internal processing time of typ. 200 ms; during this time the supply voltage must not be switched off.

The SET function should be carried out whilst the encoder is at rest.



The number of preset value writing cycles is limited to 10,000.

If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.

Approvals	
E1 compliant in accordance with	ECE guideline
UL compliant in accordance with	File no. E224618
CE compliant in accordance with	
EMC Directive	2014/30/EU
RoHS Directive	2011/65/EU
ATEX Directive	2014/34/EU (for Ex 2/22 variants)
UKCA compliant in accordance with	
EMC Regulations	S.I. 2016/1091
RoHS Regulations	S.I. 2012/3032
UKEX Regulations	S.I. 2016/1107 (for Ex 2/22 variants)

Absolute encoders – singleturn


Compact, robust magnetic	Sendix M3651AR (shaft)	Analog
---------------------------------	-------------------------------	---------------

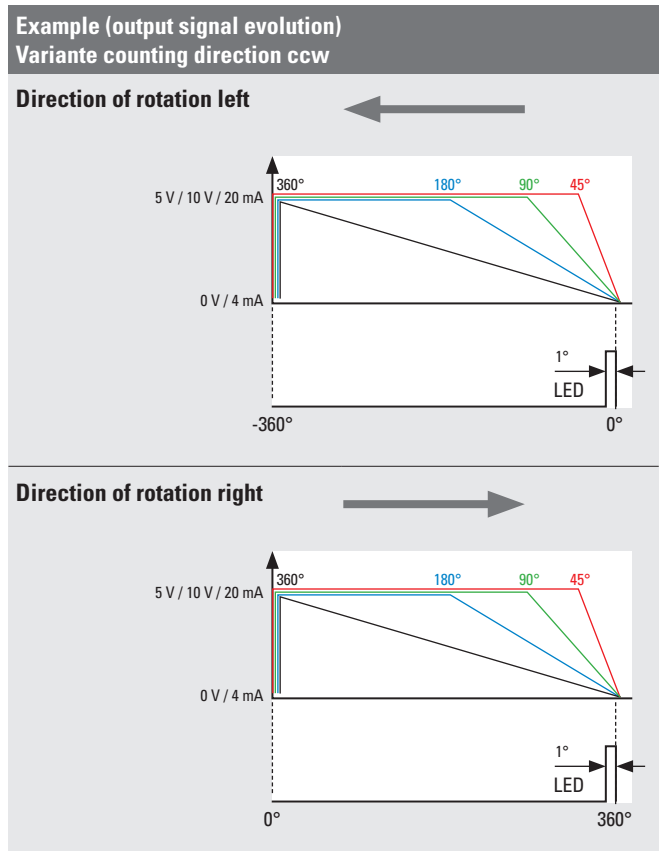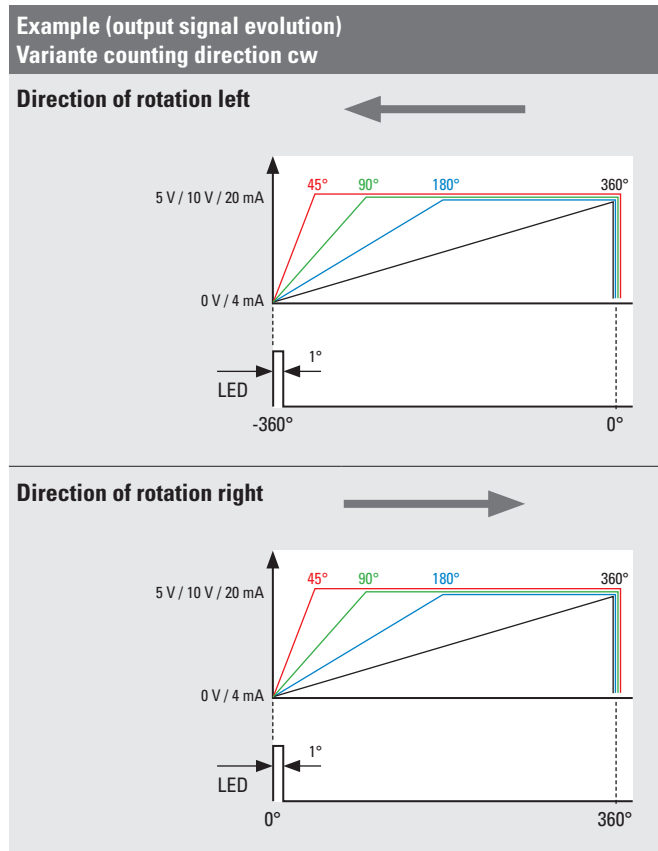

Terminal assignment

Interface 3 (current)	Type of connection 2, B	Cable (isolate unused cores individually before initial start-up)					
		Signal:	0 V	+V	+I	SET	–
		Core color:	WH	BN	GN	GY	PK
Interface 3 (current)	Type of connection 4	M12 connector, 5 pin					
		Signal:	0 V	+V	+I	SET	–
		Pin:	3	2	1	5	4
Interface 4, 5 (voltage)	Type of connection 2, B	Cable (isolate unused cores individually before initial start-up)					
		Signal:	0 V	+V	+U	SET	–
		Core color:	WH	BN	GN	GY	PK
Interface 4, 5 (voltage)	Type of connection 4	M12 connector, 5 pin					
		Signal:	0 V	+V	+U	SET	–
		Pin:	3	2	1	5	4

Top view of mating side, male contact base



M12 connector, 5-pin

- +V: Supply voltage encoder +V DC
- 0 V: Supply voltage encoder ground GND (0 V)
- +U: Voltage
- +I: Current
- SET: Set input

Absolute encoders – singleturn

Compact, robust magnetic	Sendix M3651AR (shaft)	Analog
---------------------------------	-------------------------------	---------------



Dimensions

Dimensions in mm [inch]

Aluminum
clamping flange, \varnothing 42 [1.65]
version 1

1 3 x M3, 6 [0.24] deep



D	Fit	L
6 [0.24]	h7	12,5 [0.49]
8 [0.32]	h7	15 [0.59]
10 [0.39]	f7	20 [0.79]
1/4"	h7	12,5 [0.49]

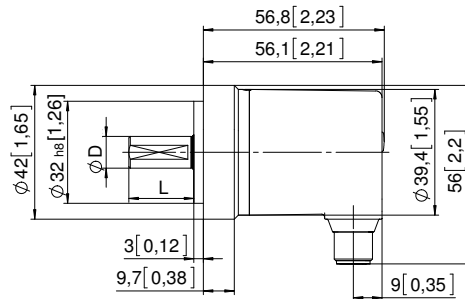

Stainless steel V4A
clamping flange, \varnothing 42 [1.65]
version 7

1 4 x M4, 8 [0.31] deep

D	Fit	L
10 [0.39]	f7	20 [0.79]

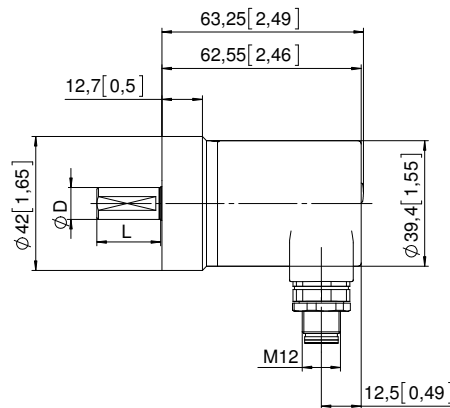

Absolute encoders – singleturn

Compact magnetic

Sendix M3651A / M3671A (shaft / hollow shaft) Analog

Dimensions hollow shaft version


Dimensions in mm [inch]

Flange with spring element, long Flange type 3 and 6

- 1 Slot spring element, recommendation: cylindrical pin DIN 7, $\varnothing 4$ [0.16]
- 2 Recommended torque for the clamping ring 0.7 Nm

D	Fit	L	D1
6 [0.24]	H7	18.5 [0.73]	24 [0.94]
8 [0.32]	H7	18.5 [0.73]	25.5 [1.00]
10 [0.39]	H7	18.5 [0.73]	25.5 [1.00]
1/4"	H7	18.5 [0.73]	24 [0.94]

L = insertion depth max. blind hollow shaft

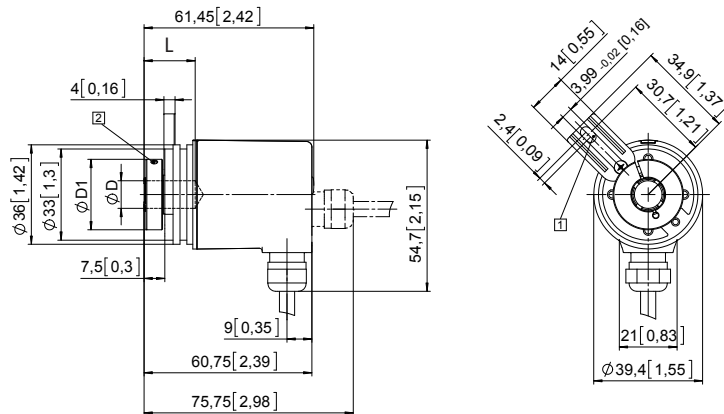

Flange with stator coupling, $\varnothing 46$ [1.81] Flange type 2 and 5

- 1 Recommended torque for the clamping ring 0.7 Nm

D	Fit	L	D1
6 [0.24]	H7	18.5 [0.73]	24 [0.94]
8 [0.32]	H7	18.5 [0.73]	25.5 [1.00]
10 [0.39]	H7	18.5 [0.73]	25.5 [1.00]
1/4"	H7	18.5 [0.73]	24 [0.94]

L = insertion depth max. blind hollow shaft

