

Linear measuring technology

Draw-wire encoder C100	Base-Line	Measuring length max. 5 m
-------------------------------	------------------	----------------------------------



The draw wire system C100 is more than a sensor for determining length-related position data. Variants with integrated inclinometer and redundant interfaces offer versatile application possibilities. The contactless magnetic position scanning, a high IP67 protection level and the wider temperature range round off the product.



Analog output



Wide temperature range



High protection level



Shock / vibration resistant



Redundancy



Relay output



Switching outputs

Characteristics

- Measuring length up to 5 m.
- Integrated inclinometer.
- Redundant sensors.
- Different types of sensors (analog, incremental, CANopen, relay output, switch output).
- Linearity up to $\pm 0.1\%$ of the measuring range.
- High protection level IP67 and wide temperature range from -40 °C ... $+85\text{ °C}$.

Advantages

- The suitable measuring length for every application.
- Cost, space and installation work saving.
- For even higher plant availability.
- Simple selection and fast installation.
- High accuracy at economic prices.
- Reliability and long service life for outdoor applications.

Order code with analog sensor

D8 . C100 . XXXX . XXX 1 . 1 000

a Measuring length

0100 = 1 m
0200 = 2 m
0300 = 3 m
0400 = 4 m
0500 = 5 m

b Single sensor

A11 = 4 ... 20 mA
A22 = 0 ... 10 V
A44 = 0.5 ... 4.5 V

Redundat sensor

R11 = 2 x 4 ... 20 mA
R22 = 2 x 0 ... 10 V
R44 = 2 x 0.5 ... 4.5 V

Crossed signals

R1C = 4 ... 20 mA / 20 ... 4 mA
R2C = 0 ... 10 V / 10 ... 0 V
R4C = 0,5 ... 4,5 V / 4,5 ... 0,5 V

c Type of connection

1 = M12 connector, 5-pin

Order code with CANopen and inclinometer

D8 . C100 . XXXX . XXX 1 . 1 X 00

a Measuring length

0100 = 1 m
0200 = 2 m
0300 = 3 m
0400 = 4 m
0500 = 5 m

b Sensor type

RC1 = CANopen redundant
RCT = CANopen redundant,
with termination resistor 120 Ω

c Type of connection

1 = M12 connector, 5-pin

d Inclinometers

0 = none
1 = 1 inclinometer
2 = 2 inclinometers

Stock types

D8.C100.0500.RC11.1000

Linear measuring technology

Draw-wire encoder C100	Base-Line	Measuring length max. 5 m
-------------------------------	------------------	----------------------------------

Order code with incremental output	<table border="1" style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 2px 5px;">D8.</td> <td style="padding: 2px 5px;">C100.</td> <td style="padding: 2px 5px;">XXXX.</td> <td style="padding: 2px 5px;">XXX</td> <td style="padding: 2px 5px;">X.</td> <td style="padding: 2px 5px;">1</td> <td style="padding: 2px 5px;">000</td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">a</td> <td style="text-align: center;">b</td> <td style="text-align: center;">c</td> <td></td> <td></td> </tr> </table>	D8.	C100.	XXXX.	XXX	X.	1	000			a	b	c		
D8.	C100.	XXXX.	XXX	X.	1	000									
		a	b	c											
a <i>Measuring length</i> 0100 = 1 m 0200 = 2 m 0300 = 3 m 0400 = 4 m 0500 = 5 m	b <i>Sensor type</i> I11 = incremental AB, 512 ppr I12 = incremental ABZ, 512 ppr I21 = incremental AB, 1024 ppr I22 = incremental ABZ, 1024 ppr	c <i>Type of connection</i> 1 = M12 connector, 5-pin 3 = radial cable, 2 m [6.56']													

Order code with relays output	<table border="1" style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 2px 5px;">D8.</td> <td style="padding: 2px 5px;">C100.</td> <td style="padding: 2px 5px;">XXXX.</td> <td style="padding: 2px 5px;">RL1</td> <td style="padding: 2px 5px;">1.</td> <td style="padding: 2px 5px;">1</td> <td style="padding: 2px 5px;">000</td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">a</td> <td style="text-align: center;">b</td> <td style="text-align: center;">c</td> <td></td> <td></td> </tr> </table>	D8.	C100.	XXXX.	RL1	1.	1	000			a	b	c		
D8.	C100.	XXXX.	RL1	1.	1	000									
		a	b	c											
a <i>Measuring length</i> 0100 = 1 m 0200 = 2 m 0300 = 3 m 0400 = 4 m 0500 = 5 m	b <i>Sensor type</i> RL1 = relay output	c <i>Type of connection</i> 1 = M12 connector, 5-pin													

Order code with switch output	<table border="1" style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 2px 5px;">D8.</td> <td style="padding: 2px 5px;">C100.</td> <td style="padding: 2px 5px;">XXXX.</td> <td style="padding: 2px 5px;">SW3</td> <td style="padding: 2px 5px;">4.</td> <td style="padding: 2px 5px;">1</td> <td style="padding: 2px 5px;">000</td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">a</td> <td style="text-align: center;">b</td> <td style="text-align: center;">c</td> <td></td> <td></td> </tr> </table>	D8.	C100.	XXXX.	SW3	4.	1	000			a	b	c		
D8.	C100.	XXXX.	SW3	4.	1	000									
		a	b	c											
a <i>Measuring length</i> 0100 = 1 m 0200 = 2 m 0300 = 3 m 0400 = 4 m 0500 = 5 m	b <i>Sensor type</i> SW3 = 3 switch outputs	c <i>Type of connection</i> 4 = M12 connector, 12-pin													

Accessories relays output	Order no.
Teach adapter (for sensor type RL1) M12 connector, 5-pin adapter with button	D8.C100.RL1.TEACH
Accessories switch output	Order no.
Visualization adapter (for sensor type SW3) M12 connector, 12-pin	D8.C100.SW3.VISUAL
Cables and connectors	Order no.
Preassembled cables	
M12 female connector with coupling nut, 5-pin, A coded, straight single ended 2 m [6.56'] PVC cable	05.00.6081.2211.002M
M12 female connector with coupling nut, 12-pin, A coded, straight single ended 2 m [6.56'] PVC cable	05.00.60B1.B211.002M
Connectors	
M12 female connector with coupling nut, 5-pin, A coded, straight (metal/plastic)	05.B-8151-0/9
M12 female connector with coupling nut, 5-pin, A coded, right-angle (plastic)	05.B-8251-0/9
M12 female connector with coupling nut, 12-pin, A coded, straight (metal)	8.0000.5162.0000

Further Kübler cables and connectors can be found at: kuebler.com/connection-technology

Linear measuring technology

Draw-wire encoder C100	Base-Line	Measuring length max. 5 m
-------------------------------	------------------	----------------------------------

Technical data

Mechanical characteristics (draw-wire mechanics)	
Measuring range	1.0 ... 5.0 m
Measuring wire	material AISI304 steel wire Nylon coated diameter \varnothing 0.9 mm \varnothing 0.61 mm (ABZ Incremental)
Wire fastening	eyelet internal diameter \varnothing 8 mm outer diameter \varnothing 15 mm height 2 mm
Speed max.	1 m/s
Acceleration max.	10 m/s ²
Linearity (whole measuring range)	analog \pm 0.8 % incremental (\leq 2 m) \pm 0.1 % incremental ($>$ 2 m) \pm 0.3 % CANopen / relay \pm 0.5 %
Repetition accuracy (whole measuring range)	analog \pm 0.3 % incremental (\leq 2 m) \pm 0.1 % incremental ($>$ 2 m) \pm 0.3 % CANopen / relay \pm 0.3 %
Pull-back force	typ. 2 N ¹⁾
Pull-out force	typ. 8 N
Drum circumference	245 mm
Type of connection	M12 connector, 5-pin cable, 2 m [6.56'] (only incremental)
Housing	polycarbonate reinforced with glass fibers
Protection	IP67
Temperature range	-40 °C ... +85 °C [-40 °F ... +185 °F]
Weight	approx. 0.5 kg [17.67 oz]
Shock resistance acc. to EN 60068-2-27	300 m/s ² , 11 ms
Vibration resistance acc. to EN 60068-2-6	100 m/s ² , 10 ... 500 Hz

Electrical characteristics	
Supply voltage	
Sensor type:	
A11, A22, R11, R22, R1C, R2C	12 ... 30 V DC
A44, R44, R4C	9 ... 30 V DC
RC1, RCT	9 ... 30 V DC
RL1, SW3	9 ... 30 V DC
I11, I12, I21, I22	9 ... 30 V DC

Analog sensor	
Output signal	analog
Resolution	12 bit

Incremental output	
Output signal	AB (Z optional)
Resolution	512 / 1024 ppr
Current consumption (non load)	max. 100 mA
Output current	max. 50 mA
Circuit	TTL

CANopen	
Output signal	CANopen (DS301)
Resolution	14 bit
Resolution inclinometer	0.1°
Accuracy inclinometer	\pm 0.6°
Temperature drift inclinometer	\pm 0.01 % / °C

Relay output	
Output signal	1x relay (Normally Open)
Maximum current	50 mA
Hysteresis	20 mm (factory setting)

Switch output	
Output signal	switch
Maximum current	0.5 A
Mechanical service life	without load min. 1,000,000 switching operations (60 switching operations/ min.) under load min. 30,000 switching operations (30 switching operations/ min.)

Approvals	
Electromagnetic compatibility	acc. to EN 61326-1, EN 61326-3-1
CE compliant in accordance with	
EMC Directive	2014/30/EU
RoHS Directive	2011/65/EU


1) May be lower at low temperatures.

Linear measuring technology


Draw-wire encoder C100 Base-Line Measuring length max. 5 m

Terminal assignment

Sensor type	Interface	Type of connection	M12 connector, 5-pin					
Analog sensor A11, R11, R1C	(2x) 4 ... 20 mA	1	Signal:	+V	0 V	I _{out 1}	I _{out 2} ¹⁾	n.c.
			Pin:	1	2	3	4	5

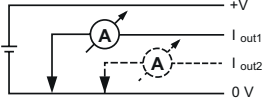


Sensor type	Interface	Type of connection	M12 connector, 5-pin					
Analog sensor A22, R22, R2C A44, R44, R4C	(2x) 0 ... 10 V (2x) 0.5 ... 4.5 V	1	Signal:	+V	0 V	U _{out 1}	U _{out 2} ¹⁾	n.c.
			Pin:	1	2	3	4	5

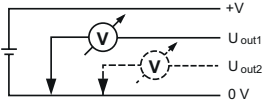

Sensor type	Interface	Type of connection	M12 connector, 5-pin					
I11, I12, I21, I22	incremental output	1	Signal:	+V	0 V	A	B	0
			Pin:	1	2	3	4	5

Sensor type	Interface	Type of connection	M12 connector, 5-pin					
RC1, RCT	CANopen	1	Signal:	+V	0 V	CAN-GND	CAN-H	CAN-L
			Pin:	2	3	1	4	5

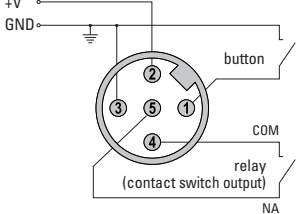
Sensor type	Interface	Type of connection	M12 connector, 5-pin					
RL1	relay	1	Signal:	+V	0 V	Teach	CAN-H	NO
			Pin:	2	3	1	4	5
			<p>The switching point of the relay can be set by means of a button connected to pin 1 (Teach). To do so, position the draw-wire mechanic at the desired switching point and then press the button once.</p> 					

Sensor type	Interface	Type of connection	Cable (isolate unused cores individually before initial start-up)					
I11, I12, I21, I22	incremental output	3	Signal:	+V	0 V	A	B	0
			Core color:	WH	YE	BN	GN	GY


Sensor type	Interface	Type of connection	M12 connector, 12-pin												
SW3	switching output	4	Signal:	NC 1	NO 1	C 1	NC 2	NO 2	C 2	NC 3	NO 3	C 3	n.c.	n.c.	n.c.
			Pin:	1	2	3	4	5	6	7	8	9	10	11	12

- | | | | | | |
|----------------------|------------------------------|---------|----------------------|--------|-------------------------|
| +V : | Supply voltage +V DC | Teach : | Teach function input | C 1 : | Switching contact C.1 |
| 0 V : | Supply voltage GND (0V) | C : | Relay contact C | C 2 : | Switching contact C.2 |
| I _{out 1} : | Current output 1 | NO : | Relay contact N.O. | C 3 : | Switching contact C.3 |
| I _{out 2} : | Current output 2 | n.c. : | not connected | NO 1 : | Switching contact N.O.1 |
| U _{out 1} : | Voltage output 1 | AGND : | Analog Ground | NO 2 : | Switching contact N.O.2 |
| U _{out 2} : | Voltage output 2 | | | NO 3 : | Switching contact N.O.3 |
| A : | Incremental output channel A | | | NC 1 : | Switching contact N.C.1 |
| B : | Incremental output channel B | | | NC 2 : | Switching contact N.C.2 |
| 0 : | Reference signal | | | NC 3 : | Switching contact N.C.3 |

Top view of mating side, male contact base



M12 connector, 5-pin



M12 connector, 12-pin

1) Only in case of redundant ordering option sensor type R11, R1C, R22, R2C, R44, R4C (otherwise n.c.).

Linear measuring technology

Draw-wire encoder C100	Base-Line	Measuring length max. 5 m
-------------------------------	------------------	----------------------------------

Technology in detail

Operating principle

Construction
The core of a draw-wire device is a drum mounted on bearings, onto which a wire is wound. Winding takes place via a spring-loaded device.

The diagram shows a cylindrical drum with a wire wound around it. Labels indicate 'Drum width' (the horizontal span of the drum), 'Drum diameter' (the vertical height of the drum), and 'Wire diameter' (the thickness of the wire).

Note
Exceeding the maximum extension length of the draw-wire will lead to damage to the wire and the mechanics.

Inclinometer with option RC1

Setting possibility 360°

0°

0° ... 360°

Setting possibility ±180°

0°

±180°

Redundant signals possible.

Setting possibilities:

- Switching between setting possibilities 180° and 360°.
- Switching between synchronous and asynchronous output.
- Change of direction of rotation (cw/ccw).
- Setting and resetting an offset.

Linear measuring technology


Draw-wire encoder C100

Base-Line

Measuring length max. 5 m

Dimensions

Dimensions in mm [inch]

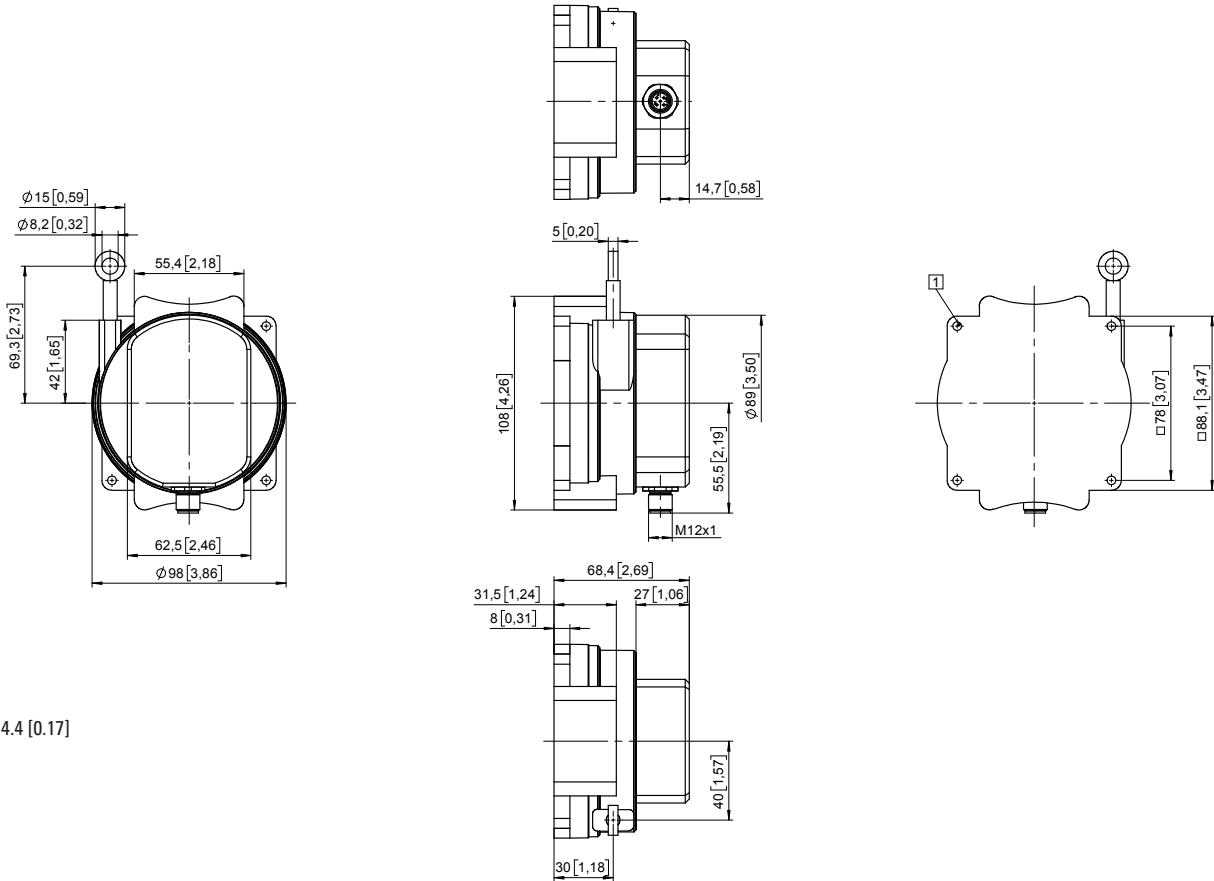

1 4 x $\varnothing 4.4$ [0.17]