

Absolute encoders - singleturn

Compact magnetic	Sendix 3651 / 3671 (shaft / hollow shaft)	Analog
-------------------------	--------------------------------------------------	---------------

Order code Hollow shaft	8.3671 Type	<table border="1" style="border-collapse: collapse; text-align: center; width: 100%;"> <tr> <td style="width: 25%;">XXXX</td> <td style="width: 25%;">.XXXX</td> <td style="width: 25%;">XXXX</td> <td style="width: 25%;">XXXX</td> </tr> <tr> <td style="font-size: 8px;">a</td> <td style="font-size: 8px;">b</td> <td style="font-size: 8px;">c</td> <td style="font-size: 8px;">d</td> </tr> <tr> <td style="font-size: 8px;">e</td> <td style="font-size: 8px;">f</td> <td style="font-size: 8px;">g</td> <td style="font-size: 8px;">h</td> </tr> </table>	XXXX	.XXXX	XXXX	XXXX	a	b	c	d	e	f	g	h	<p>a Flange 2 = with spring element, long 5 = with stator coupling, \varnothing 46 mm [1.81"]</p> <p>b Blind hollow shaft (insertion depth max. 18 mm [0.71"]) 2 = \varnothing 6 mm [0.24"] 4 = \varnothing 8 mm [0.32"] 6 = \varnothing 10 mm [0.39"] 3 = \varnothing 1/4"</p> <p>c Output circuit¹⁾ 3 = current output 4 = voltage output</p> <p>d Type of connection 1 = axial cable, 1 m [3.28'] PUR A = axial cable, special length PUR *) 2 = radial cable, 1 m [3.28'] PUR B = radial cable, special length PUR *) 3 = axial M12 connector, 5-pin 4 = radial M12 connector, 5-pin *) Available special lengths (connection types A, B): 2, 3, 5, 8, 10, 15 m [6.56, 9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm ex.: 8.3671.523A.1311.0030 (for cable length 3 m)</p> <p>e Measuring range 1 = 1 x 360° 2 = 1 x 180° 3 = 1 x 90° 4 = 1 x 45°</p> <p>f Interface / supply voltage 3 = 4 ... 20 mA / 10 ... 30 V DC 4 = 0 ... 10 V / 15 ... 30 V DC 5 = 0 ... 5 V / 10 ... 30 V DC</p> <p>g Option 1 1 = count direction cw²⁾ 2 = count direction ccw³⁾</p> <p>h Option 2 1 = IP67 2 = IP69k</p> <p style="text-align: right;"><i>Optional on request</i> - Ex 2/22 (only for type of connection 3 + 4) - surface protection salt spray tested</p>
XXXX	.XXXX	XXXX	XXXX												
a	b	c	d												
e	f	g	h												

Mounting accessory for shaft encoders	Order no.
Coupling Bellows coupling \varnothing 19 mm [0.75"] for shaft 6 mm [0.24"]	8.0000.1102.0606

Mounting accessory for hollow shaft encoders	Dimensions in mm [inch]	Order no.
Torque pin, \varnothing 4 mm for flange with spring element (flange type 3 + 6)	with fixing thread 	8.0010.4700.0000

Cables and connectors	Order no.
Preassembled cables M12 female connector with coupling nut, 5-pin, A coded, straight open ended 2 m [6.56'] PVC cable	05.00.6081.2211.002M
Connectors M12 female connector with coupling nut, 5-pin, A coded, straight (metal)	8.0000.5116.0000

Further Kübler accessories can be found at: kuebler.com/accessories
Further Kübler cables and connectors can be found at: kuebler.com/connection-technology

1) Output circuit "3" only in conjunction with interface "3",
output circuit "4" only in conjunction with interface "4" or "5".

2) cw = increasing code values when shaft turning clockwise (cw). Top view on shaft.
3) ccw = increasing code values when shaft turning counterclockwise (ccw). Top view on shaft.

Absolute encoders - singleturn

Compact magnetic	Sendix 3651 / 3671 (shaft / hollow shaft)	Analog
-------------------------	--------------------------------------------------	---------------

Technical data

Electrical characteristics current interface 4 ... 20 mA		
Sensor		
Supply voltage	10 ... 30 V DC	
Current consumption (no load)	max. 38 mA	
Reverse polarity protection of the supply voltage	yes	
Measuring range	45°, 90°, 180° or 360°	
Resolution	12 bit	
Absolute accuracy, 25 °C [77 °F]	±1°	
Repeat accuracy, 25 °C [77 °F]	±0.2°	
Status LED	red	break in current loop, input load too high.
	green	reference point display turns ON at cw: betw. 0° and 1° at ccw: betw. 0° and -1°
Current loop Output load	max. 200 Ohm at 10 V DC max. 900 Ohm at 24 V DC	
Setting time	< 1 ms $R_{load} = 400 \text{ Ohm}, 25 \text{ °C [77 °F]}$	
Short-circuit proof outputs When the supply voltage is correctly applied. But not output to +V. Supply voltage and sensor output signal are not galvanically isolated.		

Electrical characteristics voltage interface		
Sensor		
Supply voltage	output 0 ... 5 V	10 ... 30 V DC
	output 0 ... 10 V	15 ... 30 V DC
Current consumption (no load)	max. 35 mA	
Reverse polarity protection of the supply voltage	yes	
Measuring range	45°, 90°, 180° or 360°	
Resolution	12 bit	
Linearity, 25 °C [77 °F]	±1°	
Repeat accuracy, 25 °C [77 °F]	±0.2°	
Voltage output		
Current output	max. 10 mA	
Setting time	< 1 ms $R_{load} \geq 1 \text{ KOhm}, 25 \text{ °C [77 °F]}$	
Short-circuit proof outputs When the supply voltage is correctly applied. But not output to +V. Supply voltage and sensor output signal are not galvanically isolated.		

Mechanical characteristics		
Maximum speed	6000 min ⁻¹	
Starting torque at 20 °C [68 °F]	< 0.06 Nm	
Shaft load capacity	radial	40 N
	axial	20 N
Weight	approx. 0.2 kg [7.06 oz]	
Protection acc. to EN 60529	IP67 / IP69k	
Working temperature range	-40 °C ... +85 °C [-40 °F ... +185 °F]	
Materials	shaft / hollow shaft	stainless steel
	flange	aluminum
	housing	zinc die-cast
	cable	PUR
Shock resistance acc. to EN 60068-2-27	5000 m/s ² , 6 ms	
Vibration resistance acc. to EN 60068-2-6	300 m/s ² , 10 ... 2000 Hz	
Permanent shock resistance acc. to EN 60068-2-27	1000 m/s ² , 2 ms	
Vibration (broad-band random) acc. to EN 60068-2-64	5 ... 2500 Hz, 100 m/s ² - rms	

Approvals		
E1 compliant in accordance with	ECE guideline	
UL compliant in accordance with	File no. E224618	
CE compliant in accordance with		
	EMC Directive	2014/30/EU
	RoHS Directive	2011/65/EU
	ATEX Directive	2014/34/EU (for Ex 2/22 variants)
UKCA compliant in accordance with		
	EMC Regulations	S.I. 2016/1091
	RoHS Regulations	S.I. 2012/3032
	UKEX Regulations	S.I. 2016/1107 (for Ex 2/22 variants)

Status LED (green)		
Status LED	green	reference point display turns ON at cw: betw. 0° and 1° at ccw: betw. 0° and -1°


Absolute encoders - singleturn

Compact magnetic	Sendix 3651 / 3671 (shaft / hollow shaft)	Analog
-------------------------	--------------------------------------------------	---------------


Example (output signal profile)

Measurement range 45° / 90° / 180° / 360°

Version cw

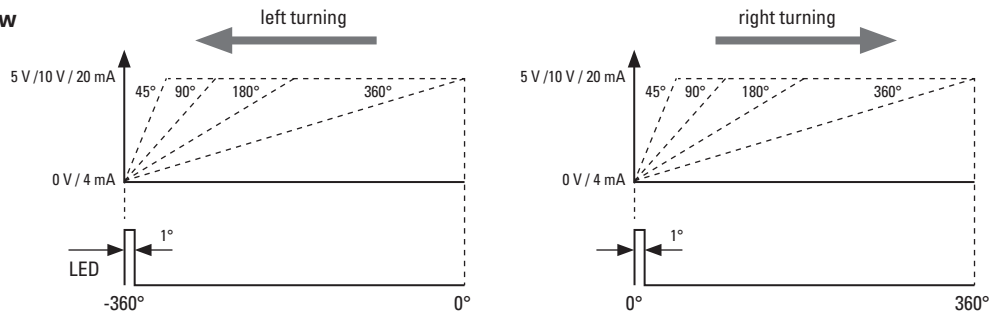

Version ccw

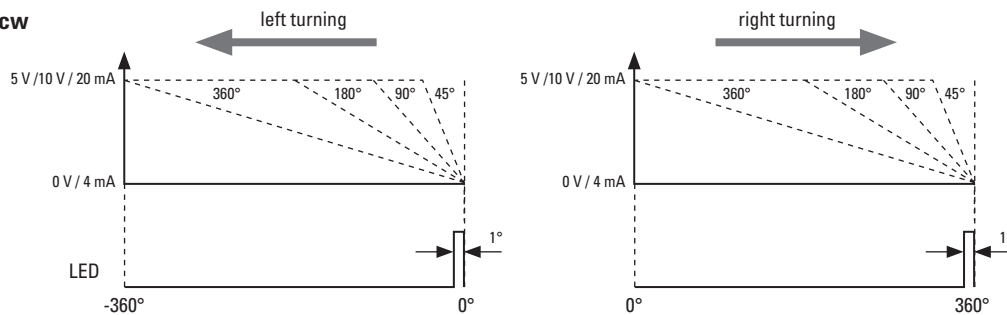


Terminal assignment

Interface 3 (current)	Type of connection 1, 2, A, B	Cable (isolate unused cores individually before initial start-up)				
		Signal:	0 V	+V	+I	-I
		Core color:	WH	BN	GN	YE
Interface 3 (current)	Type of connection 3, 4	M12 connector, 5-pin				
		Signal:	0 V	+V	+I	-I
		Pin:	3	2	4	5
Interface 4, 5 (voltage)	Type of connection 1, 2, A, B	Cable (isolate unused cores individually before initial start-up)				
		Signal:	0 V	+V	+U	-U
		Core color:	WH	BN	GN	YE
Interface 4, 5 (voltage)	Type of connection 3, 4	M12 connector, 5-pin				
		Signal:	0 V	+V	+U	-U
		Pin:	3	2	4	5

- +V : Supply voltage encoder +V DC
- 0 V : Supply voltage encoder ground GND (0 V)
- +U / -U : Voltage + / voltage -
- +I / -I : Current + / current -

Top view of mating side, male contact base



M12 connector, 5-pin

Absolute encoders - singleturn

Compact magnetic	Sendix 3651 / 3671 (shaft / hollow shaft)	Analog
-------------------------	--------------------------------------------------	---------------

Dimensions shaft version


Dimensions in mm [inch]

Synchro flange, \varnothing 36 [1.42]

Flange type 2

(drawing with cable)

1 4 x M3, 6 [0.24] deep

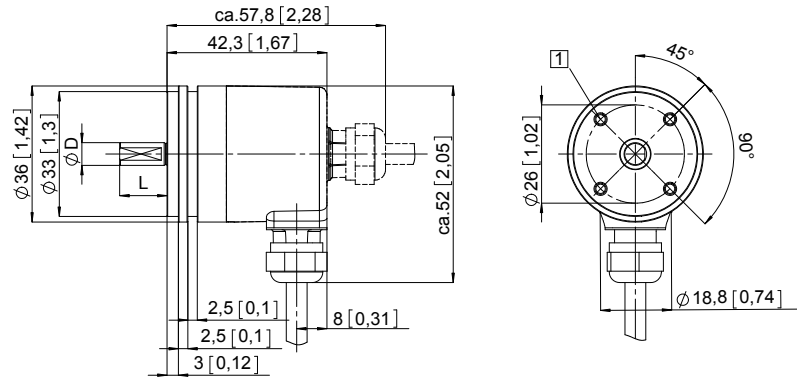


D	Fit	L
6 [0.24]	h7	12.5 [0.49]
8 [0.32]	h7	12.5 [0.49]
1/4"	h7	12.5 [0.49]

Synchro flange, \varnothing 36 [1.42]

Flange type 2

(drawing with M12 connector)

1 4 x M3, 6 [0.24] deep

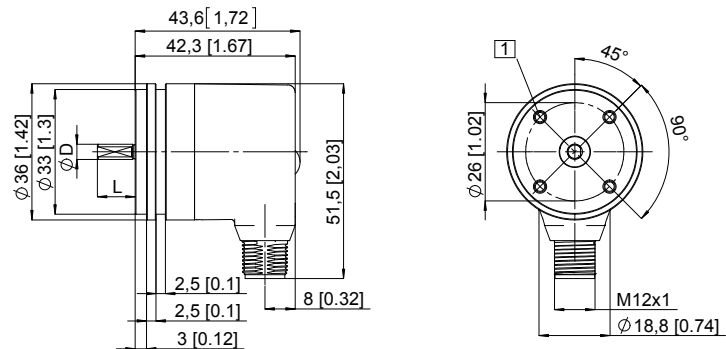

D	Fit	L
6 [0.24]	h7	12.5 [0.49]
8 [0.32]	h7	12.5 [0.49]
1/4"	h7	12.5 [0.49]

Absolute encoders - singleturn

Compact magnetic	Sendix 3651 / 3671 (shaft / hollow shaft)	Analog
-------------------------	--------------------------------------------------	---------------

Dimensions hollow shaft version


Dimensions in mm [inch]

Flange with spring element, long Flange type 2

- 1 Slot spring element, recommendation: torque pin DIN 7, \varnothing 4 [0.16]
- 2 Recommended torque for the clamping ring 0.7 Nm

D	Fit	L
6 [0.24]	H7	18 [0.71]
8 [0.32]	H7	18 [0.71]
10 [0.39]	H7	18 [0.71]
1/4"	H7	18 [0.71]

L = insertion depth blind hollow shaft

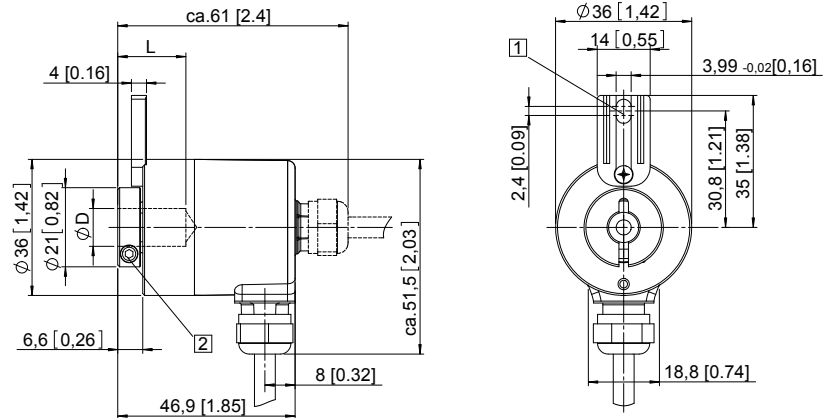

Flange with stator coupling, \varnothing 46 [1.81] Flange type 5

- 1 Recommended torque for the clamping ring 0.7 Nm

D	Fit	L
6 [0.24]	H7	18 [0.71]
8 [0.32]	H7	18 [0.71]
10 [0.39]	H7	18 [0.71]
1/4"	H7	18 [0.71]

L = insertion depth blind hollow shaft

