


Linear measuring technology

Draw-wire encoder C60	Robust-Line	Measuring length max. 4 m
------------------------------	--------------------	----------------------------------

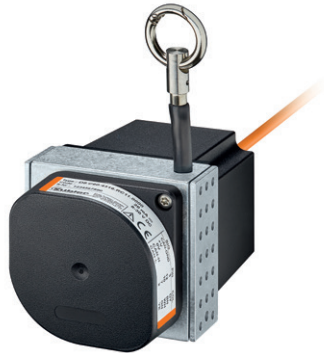

With its extremely robust design, the high protection class IP69k and the wide temperature range up to -40 °C ... +85 °C the draw-wire encoders C60 are specially developed for outdoor applications.

Their flexibility and adaptability reflects in the wide range of housing and wire types, the long measuring range and the various interfaces. The possibility of redundancy must be particularly pointed out.



Analog output



Long service life	Wide temperature range -40°...+85°C	High protection level IP69k	Redundancy	V4A 1.4404	Integrated swivel	For outdoor applications	3 housing types

Robust

- Protection level up to IP69k and wide temperature range up to -40 °C ... +85 °C.
- The titanium-anodized aluminum housing and the stainless steel wires allow using the mechanics even in harsh conditions.
- Wire diameter (stainless steel, V4A) up to \varnothing 1 mm - ideal for outdoor applications.

Versatile

- Measuring length up to 4 m.
- Redundant outputs (mA, V, R, CANopen).
- The right measuring wire and the right wire fastening for every application.
- Linearity up to ± 0.1 % of the measuring range.
- Various constructions: open, closed housing or housing with perforated sheet steel cover.

Order code

D8.C60 . **XXXXX** . **XXX X** . **0000**
Type a b c d e f

See also extended order options on page 6.

- a** *Measuring length*
 2 = 1.0 m
 3 = 1.5 m
 4 = 2.0 m
 5 = 2.5 m
 6 = 3.0 m
 7 = 3.5 m
 8 = 4.0 m
- b** *Wire types (plastic coated)*
 1 = V4A, \varnothing 0.5 mm
 2 = V4A, \varnothing 0.7 mm
 3 = V4A, \varnothing 1.0 mm

- c** *Linearity*
 1 = standard linearity 0.5 %
 2 = improved linearity 0.25 %
 3 = improved linearity 0.1 %
- d** *Housing*
 1 = open housing
 3 = housing with perforated sheet metal cover
 6 = closed housing

- e** *Single sensor / supply voltage*
 A11 = 4 ... 20 mA / 12 ... 30 V DC
 A22 = 0 ... 10 V / 12 ... 30 V DC
 A33 = 1 k Ω / max. 30 V DC
 CC1 = CANopen / 8 ... 30 V DC
- Redundant sensor / supply voltage*
 R11 = 2 x 4 ... 20 mA / 12 ... 30 V DC
 R22 = 2 x 0 ... 10 V / 12 ... 30 V DC
 R33 = 2 x 1 k Ω / max. 30 V DC
 RC1 = 2 x CANopen / 8 ... 30 V DC

- f** *Type of connection / protection level sensor*
- Cable connection, standard lengths¹⁾*
 1 = axial cable, 2 m [6.56'] TPE / IP69k
 2 = axial cable, 2 m [6.56'] TPE / IP67
 C = axial cable, 5 m [16.40'] TPE / IP69k
 E = axial cable, 5 m [16.40'] TPE / IP67
 D = axial cable, 10 m [32.81'] TPE / IP69k
 F = axial cable, 10 m [32.81'] TPE / IP67
- Connector*
 3 = axial M12 connector / IP67
 4-pin for sensor type A11 ... A33
 5-pin for sensor type CC1 ... RC1
 8-pin for sensor type R11 ... R33

Relationship measuring length – wire types – linearity

Measuring length	[m]	1.0	1.5	2.0	2.5	3.0	3.5	4.0											
order code a		2	3	4	5	6	7	8											
Wire type	\varnothing [mm]	0.5	0.7	1.0	0.5	0.7	1.0	0.5	0.7	1.0	0.5	0.7	1.0	0.5	0.7	1.0	0.5	0.7	
order code b		1	2	3	1	2	3	1	2	3	1	2	3	1	2	1	2		
Standard linearity ± 0.5 %	order code c = 1	± 0.5 %			± 0.5 %			± 0.5 %			± 0.5 %			± 0.5 %			± 0.5 %		
Improved linearity ± 0.25 %	order code c = 2	✓	✓	✓	✓	✓	✓	✓	✓	–	✓	–	–	✓	–	–	–	–	
Improved linearity ± 0.1 %	order code c = 3	✓	✓	✓	✓	✓	✓	✓	✓	–	✓	–	–	✓	–	–	–	–	

✓ feasible / – not feasible

1) Other cable length on request.

Draw-wire encoder C60

Robust-Line

Measuring length max. 4 m

Bestellschlüssel

D8.C60 . XXXXX . XXXX . 0000 . 0000
Typ a b c d e f g

a *Messlänge*

- 2 = 1,0 m
- 3 = 1,5 m
- 4 = 2,0 m
- 5 = 2,5 m
- 6 = 3,0 m
- 7 = 3,5 m
- 8 = 4,0 m

b *Seilart (kunststoffummantelt)*

- 1 = V4A, ø 0,5 mm
- 2 = V4A, ø 0,7 mm
- 3 = V4A, ø 1,0 mm

c *Linearität*

- 1 = Standard-Linearität 0,5 %
- 2 = verbesserte Linearität 0,25 %
- 3 = verbesserte Linearität 0,1 %

d *Gehäuse*

- 1 = offenes Gehäuse
- 3 = Gehäuse mit Lochblechabdeckung
- 6 = geschlossenes Gehäuse

e *Einfache Sensorik / Versorgungsspannung*

- A11 = 4 ... 20 mA / 12 ... 30 V DC
- A22 = 0 ... 10 V / 12 ... 30 V DC
- A33 = 1 kΩ / max. 30 V DC
- A44 = 0,5 ... 4,5 V / 8 ... 30 V DC
- A55 = 0 ... 5 V / 8 ... 30 V DC
- CC1 = CANopen / 8 ... 30 V DC

Redundante Sensorik / Versorgungsspannung

- R11 = 2 x 4 ... 20 mA / 12 ... 30 V DC
- R22 = 2 x 0 ... 10 V / 12 ... 30 V DC
- R33 = 2 x 1 kΩ / max. 30 V DC
- R44 = 2 x 0,5 ... 4,5 V / 8 ... 30 V DC
- R55 = 2 x 0 ... 5 V / 8 ... 30 V DC
- RC1 = 2 x CANopen / 8 ... 30 V DC

f *Anschlussart / Schutzklasse Sensor*

Kabelanschluss, Standardlängen ¹⁾

- 1 = Kabel axial, 2 m TPE / IP69k
- 2 = Kabel axial, 2 m TPE / IP67
- C = Kabel axial, 5 m TPE / IP69k
- E = Kabel axial, 5 m TPE / IP67
- D = Kabel axial, 10 m TPE / IP69k
- F = Kabel axial, 10 m TPE / IP67

Steckverbinder

- 3 = M12-Steckverbinder axial / IP67
- 4-polig bei Sensortyp A11 ... A55
- 5-polig bei Sensortyp CC1 ... RC1
- 8-polig bei Sensortyp R11 ... R55

g *Bestellerweiterungen (optional)*

Seilbefestigung (Standard = Karabinerring)

- V01 = M4-Gewinde
- V02 = Ringöse
- V07 = Clip

Erweiterter Temperaturbereich -40 °C ... +85 °C

(nur in Kombination mit der Standard-Linearität 0,5 %)

- V03 = mit Karabinerring
- V04 = mit M4-Gewinde
- V05 = mit Ringöse
- V06 = mit Clip


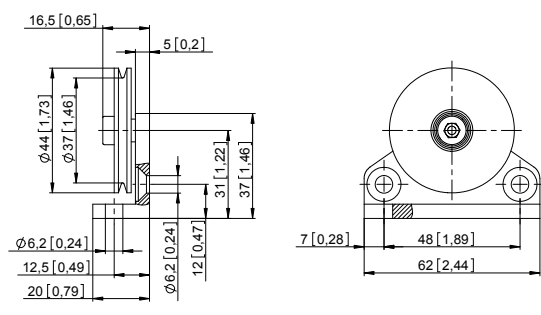

Abhängigkeit Messlänge – Seilart – Linearität

Messlänge [m]	1,0		1,5			2,0			2,5			3,0			3,5		4,0			
	Bestellcode a		2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	8	8	
Seilart ø [mm]	0,5	0,7	1,0	0,5	0,7	1,0	0,5	0,7	1,0	0,5	0,7	1,0	0,5	0,7	1,0	0,5	0,7	0,5	0,7	
Bestellcode b	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	1	2	
Standard-Linearität ±0,5 %	Bestellcode c = 1		±0,5 %			±0,5 %			±0,5 %	±1 %	±0,5 %	±1 %	±0,5 %	±1 %	±0,5 %	±1 %	±0,5 %	±1 %	±0,5 %	±1 %
Verbesserte Linearität ±0,25 %	Bestellcode c = 2		✓	✓	✓	✓	✓	✓	–	✓	–	–	✓	–	–	–	–	–	–	
Verbesserte Linearität ±0,1 %	Bestellcode c = 3		✓	✓	✓	✓	✓	–	✓	–	–	✓	–	–	–	–	–	–	–	

✓ realisierbar / – nicht realisierbar

1) Weitere Kabellängen auf Anfrage.

Linear measuring technology

Draw-wire encoder C60	Robust-Line	Measuring length max. 4 m
Accessories for draw-wire encoder		
Guide pulley for wire type 1 (0.5 mm)	Dimensions in mm [inch] Technical data: - mounting bracket (anodized alum.) - guide pulley (plastic POM) - ball bearing (type 696-2R5)	Scope of delivery: - 2 x countersunk screws for lateral fixing - 2 x hexagonal screws for fixing on a flat surface
		Order no. 8.0000.7000.0045
Extension cable (further on request)	0.5 m with clip 1.0 m with clip 2.0 m with clip	
Cables and connectors		Order no.
Preassembled cables	M12 female connector with coupling nut, 4-pin, A coded, straight single ended 2 m [6.56'] PUR cable	05.00.6061.6211.002M
	M12 female connector with coupling nut, 5-pin, A coded, straight single ended 2 m [6.56'] PVC cable	05.00.6081.2211.002M
	M12 female connector with coupling nut, 8-pin, A coded, straight single ended 2 m [6.56'] PVC cable	05.00.6041.8211.002M
Connectors	M12 female connector with coupling nut, 4-pin, A coded, straight (plastic) M12 female connector with coupling nut, 5-pin, A coded, straight (metal/plastic) M12 female connector with coupling nut, 8-pin, A coded, straight (metal)	05.B8141-0 05.B-8151-0/9 05.CMB 8181-0

Further Kübler cables and connectors can be found at: kuebler.com/connection-technology

Linear measuring technology

Draw-wire encoder C60	Robust-Line	Measuring length max. 4 m
------------------------------	--------------------	----------------------------------

Technical data

General technical data	
Standard linearity	±0.5 %, ±1 %
Improved linearity	±0.25 % or ±0.1 %
Resolution	see electrical characteristics
Sensor element	potentiometer
Output signal (others on request)	potentiometer, 4 ... 20 mA, 0 ... 10 V CANopen
Connection	axial M12 connector or axial cable outlet (TPE cable), standard length 2, 5, 10 m
Protection	M12 connector IP67 cable IP67, IP69k
Humidity	max. 90 % relative, no condensing
Working temperature standard as extended order option (s.page 6)	-20 °C ... +85 °C [-4 °F ... +185 °F] -40 °C ... +85 °C [-40 °F ... +185 °F]
Speed max.	3.0 m/s
Acceleration max.	50 m/s ²
Weight	up to approx. 420 g [14.82 oz] depending on measuring range and measuring wire diameter
Housing	aluminum, spring housing PA6
Spring force	min. 4 N / max. 6 N ¹⁾

Interface characteristics CANopen – Sensor type CC1, RC1	
CAN specification	Full CAN 2.0B (ISO11898)
Communication profile	CANopen CiA 301 V 4.2.0
Device profile	encoder, absolute linear; CiA 406 V 3.2.0
Error monitoring	Producer Heartbeat, Emergency Message, Node Guarding
Node ID	default: 7, adjustable via SDO
PDO	1 x TPDO, static mapping
PDO functions	event-triggered, time-triggered, Sync-cyclic, Sync-acyclic
Transmission rate	Default 250 kbit/s, 1 Mbps, 800, 500, 250, 125, 50, 20 kbps adjustable via SDO
Bus connection	M12 connector, 5-pin or axial cable outlet (TPE cable), standard length 2 m
Integrated bus terminating resistor	120 ohms ready-to-activate via SDO
Bus, galvanic isolation	no
Supply voltage	8 ... 30 V DC
Current consumption	typ. 10 mA at 24 V, typ. 20 mA at 12 V
Measuring rate	1 kHz with 16 bit resolution
Resolution	0.002 % of the measuring range
Electrical protection	Reverse polarity protection

Electrical characteristics (analog sensor, scaled to measuring range)

Version	A11 / R11	A22 / R22	A33 / R33
Output	4 ... 20 mA	0 ... 10 V	1 kΩ, potentiometer
Output current	max. 50 mA in case of a failure	max. 10 mA, min. load 10 kΩ	–
Max. current consumption	–	22.5 mA (non load)	–
Supply voltage	12 ... 30 V DC	12 ... 30 V DC	max. 30 V DC
Response time	< 1 ms from 0 ... 100 % and 100 ... 0 %	< 3 ms from 0 ... 100 % and 100 ... 0 %	–
Resolution	limited by the noise	limited by the noise	theoretically unlimited
Noise	0.03 mA _{pp} = 6 mV _{pp} at 200 Ω	typ. 3 mV _{pp} , max. 37 mV _{pp}	depending on the supply voltage
Recommended slider current	–	–	< 1 μA
Reverse polarity protection	yes	yes	–
Short circuit proof	–	yes, sustained short-circuit proof	–
Temperature coefficient	0.0079 %/K	0.0037 %/K	±0.0025 %/K

Characteristics measuring wire (plastic coated)

V4A, ø 0.5 mm	no.	1.4401
	breaking force	130 N
	TK	16 x 10 ⁻⁶ K ⁻¹
V4A, ø 0.7 mm	no.	1.4401
	breaking force	216 N
	TK	16 x 10 ⁻⁶ K ⁻¹
V4A, ø 1.0 mm	no.	1.4401
	breaking force	478 N
	TK	16 x 10 ⁻⁶ K ⁻¹

Approvals

Electromagnetic compatibility	acc. to EN 61326-1, EN 61326-3-1
CE compliant in accordance with	
EMC Directive	2014/30/EU
RoHS Directive	2011/65/EU

1) Depends on the measuring length.


Linear measuring technology

Draw-wire encoder C60	Robust-Line	Measuring length max. 4 m
------------------------------	--------------------	----------------------------------


Terminal assignment

Analog sensor A11 (4 ... 20 mA)			R/I converter								
	Cable ¹⁾	Signal:	+V	n.c.	I _{out}	n.c.					
	M12 connector, 4-pin	Core color:	BN	WH	BU	BK					
		Pin:	1	2	3	4					
Analog sensor R11 , redundant (2 x 4 ... 20 mA)			R/I-Wandler 1		R/I-Wandler 2						
	Cable ¹⁾	Signal:	+V ₁	I _{out 1}	+V ₂	I _{out 2}	n.c.	n.c.	n.c.	n.c.	
	M12 connector, 8-pin	Core color:	WH	GN	GY	BU	BN	YE	PK	RD	
		Pin:	1	3	5	7	2	4	6	8	
Analog sensor A22 (0 ... 10 V DC)			R/U converter								
	Cable ¹⁾	Signal:	+V	U _{out}	0 V	0 V _{out}					
	M12 connector, 4-pin	Core color:	BN	WH	BU	BK					
		Pin:	1	2	3	4					
Analog sensor R22 , redundant (2 x 0 ... 10 V DC)			R/U converter 1				R/U converter 2				
	Cable ¹⁾	Signal:	+V ₁	U _{out 1}	0 V ₁	0 V _{out 1}	+V ₂	U _{out 2}	0 V ₂	0 V _{out 2}	
	M12 connector, 8-pin	Core color:	WH	BN	GN	YE	GY	PK	BU	RD	
		Pin:	1	2	3	4	5	6	7	8	
Analog sensor A33 (potentiometer 1 kΩ)			Potentiometer								
	Cable ¹⁾	Signal:	+V	Out	0 V	n.c.					
	M12 connector, 4-pin	Core color:	BN	WH	BU	BK					
		Pin:	1	2	3	4					
Analog sensor R33 , redundant (2 x potentiometer 1 kΩ)			Potentiometer 1		Potentiometer 2						
	Cable ¹⁾	Core color:	+V ₁	Out ₁	0 V ₁	n.c.	+V ₂	Out ₂	0 V ₂	n.c.	
	M12 connector, 8-pin	Core color:	WH	BN	GN	YE	GY	PK	BU	RD	
		Pin:	1	2	3	4	5	6	7	8	
Digital sensor CC1 (CANopen)			CANopen								
	Cable ¹⁾	Signal:	+V	0 V	CAN_GND	CAN_H	CAN_L				
	M12 connector, 5-pin	Core color:	WH	BU	BN	BK	GY				
		Pin:	2	3	1	4	5				
Digital sensor RC3 , redundant (2 x CANopen)			CANopen 1 + CANopen 2								
	Cable ¹⁾	Core color:	+V	0 V	CAN_GND	CAN_H	CAN_L				
	M12 connector, 5-pin	Core color:	WH	BU	BN	BK	GY				
		Pin:	2	3	1	4	5				

Top view of mating side, male contact base



M12 connector, 4-pin



M12 connector, 5-pin



M12 connector, 8-pin

1) Isolate unused cores individually before initial start-up.

Linear measuring technology

Draw-wire encoder C60

Robust-Line

Measuring length max. 4 m


Technology in detail

Operating principle

Construction

The core of a draw-wire device is a drum mounted on bearings, onto which a wire is wound. Winding takes place via a spring-loaded device. A specific feature of Kübler draw-wire mechanics is the single-layer wire winding (for short wire lengths) to ensure best possible linearity.

Depending on the required linearity, a multi-layer winding may however be accepted for the C60 draw-wire encoder.



Note

Exceeding the maximum extension length of the draw-wire will lead to damage to the wire and the mechanics.

In addition, snapping of the cable during installation must imperatively be avoided, as this can also lead to damages.


Wire fastenings

Carabiner ring
D8.C60...xxxx.xxx.xxx

M4 thread ¹⁾
D8.C60...xxxx.xxx.xxx.V001

eyelet
D8.C60...xxxx.xxx.xxx.V002

clip
D8.C60...xxxx.xxx.xxx.V007

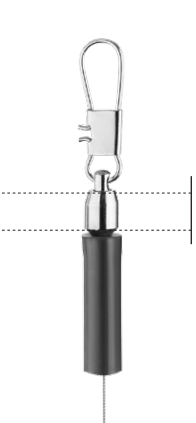

ball-bearing swivel
(no torsion of the measuring wire during installation)

rubber stopper

measuring wire

Wire types

- V4A plastic coated, \varnothing 0.5 mm, order option **b** = 1
- V4A plastic coated, \varnothing 1.0 mm, order option **b** = 2
- V4A plastic coated, \varnothing 1.5 mm, order option **b** = 3



Ideally suited for long-term outdoor use.

The plastic coating has a dirt-repellent effect and has in the same time optimum sliding properties.

Extension wire

For optimum use of the measuring range by extending the wire length, e. g. to allow realizing a pre-extension in the application.


Especially combined with analog interfaces (options A11, A22, A33 and R11, R22, R33).



Linear measuring technology

Draw-wire encoder C60	Robust-Line	Measuring length max. 4 m
------------------------------	--------------------	----------------------------------


Technology in detail

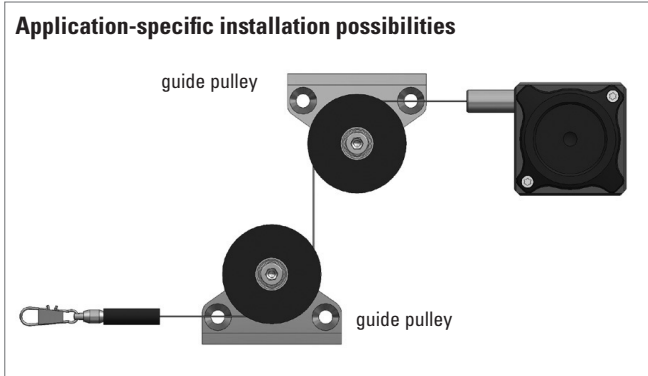

Extended temperature range -40 °C ... +85 °C
 (only in combination with the standard linearity 0.5 %)

By using special components.
 Order code extensions for the extended temperature range:

With carabiner ring:	D8.C60.xxxx.xxxx.xxxx.V003
With M4 thread:	D8.C60.xxxx.xxxx.xxxx.V004
With eyelet:	D8.C60.xxxx.xxxx.xxxx.V005
With clip:	D8.C60.xxxx.xxxx.xxxx.V008

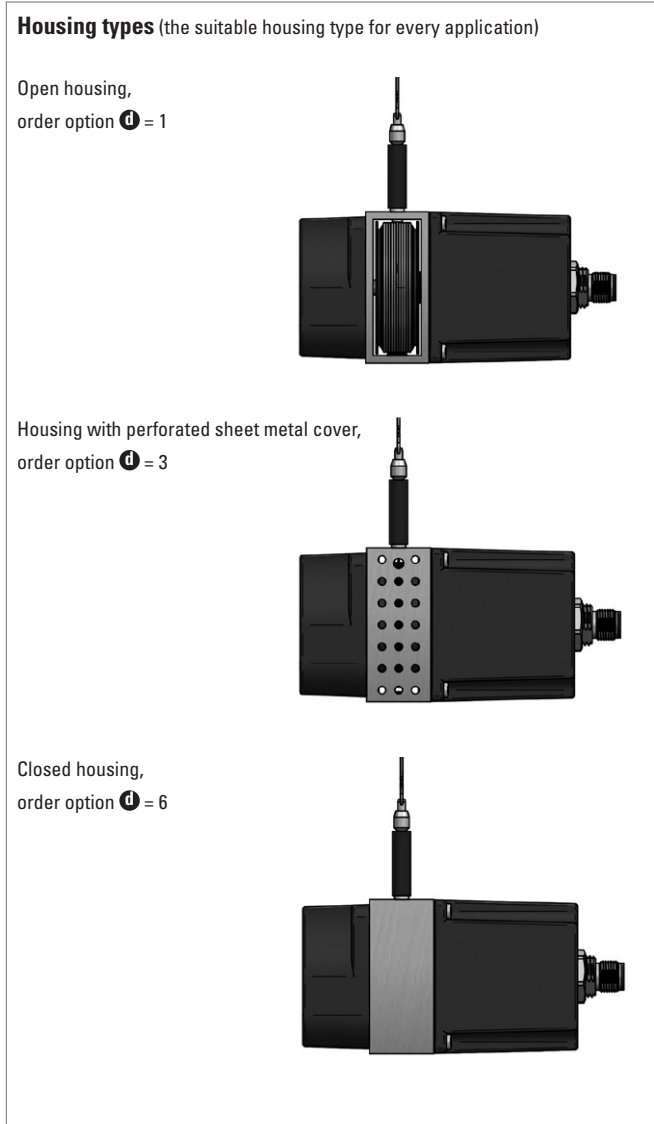

Linear measuring technology

Draw-wire encoder C60

Robust-Line


Measuring length max. 4 m

Dimensions

Dimensions in mm [inch]

With standard linearity (without wire guide)

order option **C** = 1

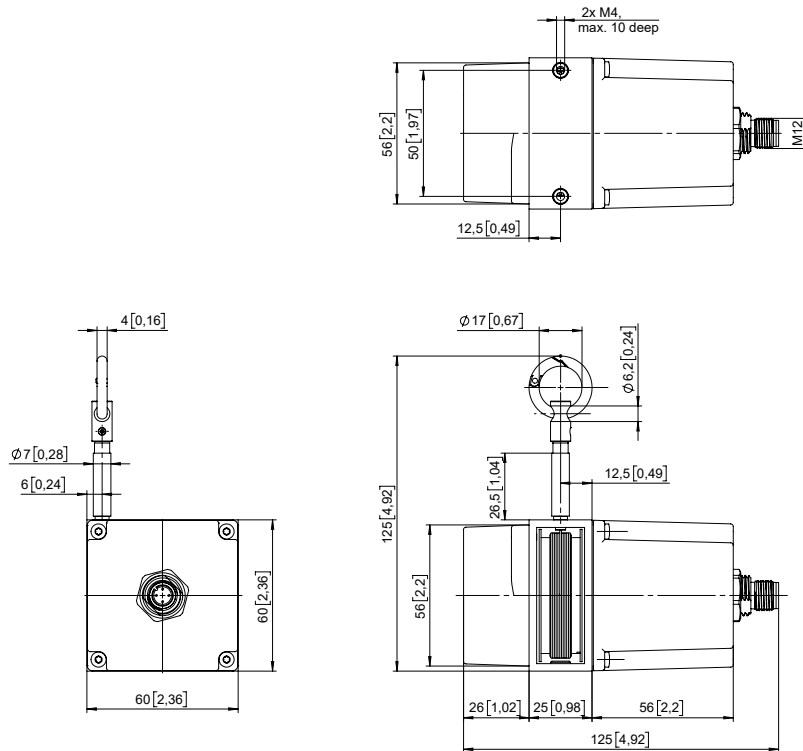

With improved linearity (with wire guide)

order option **C** = 2, 3

